



Committing to the future

testo 174T


Simple temperature measurement

for the reliable monitoring of cooling chains and sensitive goods

NEW! Free software download at:
www.testo.com

Flexible and location
independent measurement data:

- Observe • Analyze • Archive

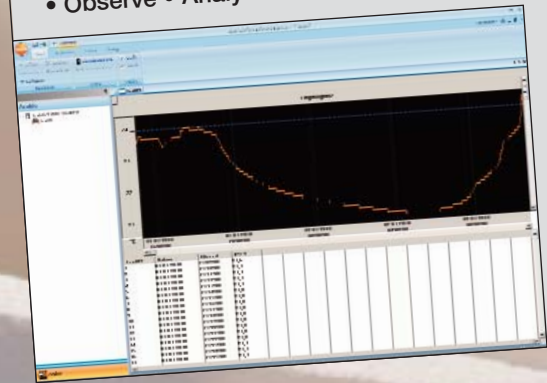



Temperature measurement with the testo 174T mini data logger



- High data integrity, even with empty battery
- Large measurement data memory
- Watertight in accordance with IP65
- Compact and robust
- Conforms to EN12830
- Issue of alarms via display
- Data transfer to the PC via USB interface



Figure: Original size

testo 174T mini data logger, 1-channel, incl. wall bracket, battery (2 x CR 2032 lithium) and calibration protocol

Order. No. 0572 1560



The testo 174T mini data logger is ideal for the temperature measurement in refrigerators, freezers, cold rooms and cold shelves.


The testo 174T as a set
testo 174T mini data logger set, 1-channel, incl. USB interface for programming and reading out the logger, wall bracket, battery (2 x CR 2032 lithium) and calibration protocol*



Order. No. 0572 0561

*Download software free of charge at: www.testo.com
Or order software CD separately

testo 174 logger software

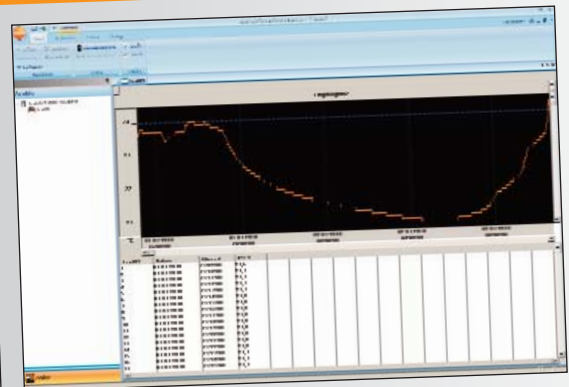

With the ComSoft testo 174 software the data logger can be configured and read out easily via USB interface. Measurement data can be analyzed quickly and intuitively.

Technical data

Probe type	Internal NTC temperature sensor
Measuring range	-30 to +70 °C
Accuracy	±0.5 °C (-30 to +70 °C)
Resolution	0.1 °C
Operating temperature	-30 to +70 °C
Storage temperature	-40 to +70 °C
Battery type	2 x 3 V button cell (2 x CR 2032 lithium), can be changed by user
Battery life	500 days (15 min measuring cycle, +25 °C)
Protection class	IP65
Meas. cycle	1 min – 24 h (can be selected)
Memory	16,000 readings
Software	can be used with Windows XP, Vista, Win7

testo AG · Postfach 1140 · D-79849 Lenzkirch · Testo-Strasse 1 · D-79853 Lenzkirch
Telephone +49 7653-681-700 · Fax +49 7653-681-701 · E-mail: info@testo.de
www.testo.com

Accessories

	Order No.	
USB interface for programming and reading out testo 174T and testo 174H loggers	0572 0500	
ComSoft testo 174 CD (if free download requiring registration from website is not desired)	0572 0580	
Lithium battery CR 2032 button cell, please order 2 batteries per logger	0515 0028	
ISO calibration certificate temperature; calibration points -18 °C; 0 °C; +60 °C; per channel/instrument	0520 0151	

0981 3754/StdXX/0/03.2010 Subject to change without notice.

Suntech Instruments Co Ltd.

Tel: 3525 7168 Fax: 3525 2177 Email: sales@suntech-hk.com www.suntech-hk.com