




MOTORIZED REAMER SHOE

9 | 10 3.0 CONFIGURATION

SPECIFICATIONS	IMPERIAL	METRIC
Maximum Differential Pressure	300 psi	(2,068 kPa)
Torque Slope	13.885 ft-lb/psi	(2.731 N-m/kPa)
Torque at Maximum Differential	4,166 ft-lb	(5,648 N-m)
Stall Torque	6,248 ft-lb	(8,471 N-m)
Maximum Horsepower	82 hp	(61 kW)
Flow Range	150 - 600 gpm	(568 - 2,271 lpm)
RPM Ratio	0.207 revolutions / g	(0.055 revolutions / l)
No Load RPM Range	31 - 124 rpm	
Recommended Hole Size	8.500 in	(216 mm)
Maximum OD	8.250 in	(210 mm)
Nominal OD	7.875 in	(200 mm)
Drill-Out Bit Size	6.000 in	(152 mm)
Maximum Weight on Bit	44,000 lb	(19,550 daN)
Overall Length	140.07 in	(3.56 m)
Overall Weight	1138.21 lb	(516.28 kg)

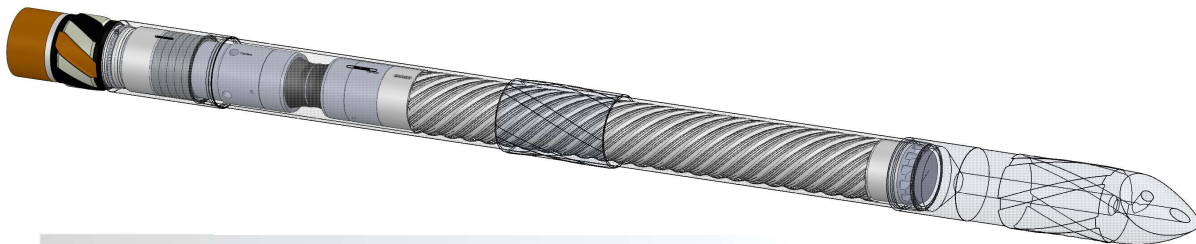

LAYOUT

