




MOTORIZED REAMER SHOE

9 | 10 2.2 CONFIGURATION

SPECIFICATIONS	IMPERIAL	METRIC
Maximum Differential Pressure	220 psi	(1,517 kPa)
Torque Slope	14.545 ft-lb/psi	(2.860 N-m/kPa)
Torque at Maximum Differential	3,200 ft-lb	(4,339 N-m)
Stall Torque	4,800 ft-lb	(6,509 N-m)
Maximum Horsepower	124 hp	(92 kW)
Flow Range	300 - 1,200 gpm	(1,136 - 4,543 lpm)
RPM Ratio	0.167 revolutions / g	(0.044 revolutions / l)
No Load RPM Range	50 - 200 rpm	
Recommended Hole Size	12.25 in	(311 mm)
Maximum OD	12.00 in	(305 mm)
Nominal OD	11.25 in	(286 mm)
Drill-Out Bit Size	8.50 in	(216 mm)
Maximum Weight on Bit	50,000 lb	(22,250 daN)
Overall Length	151.40 in	(3.85 m)
Overall Weight	1557.16 lb	(706.32 kg)

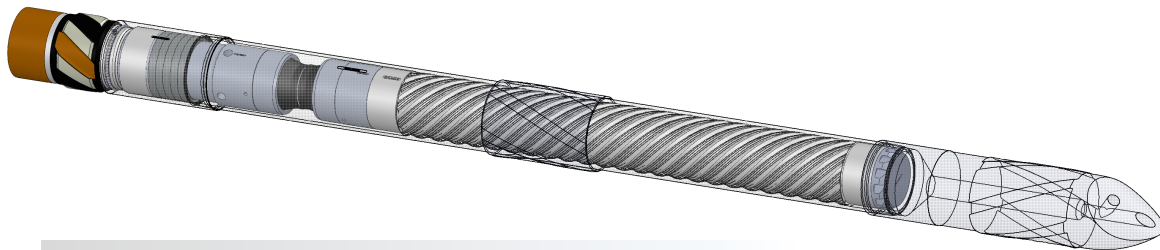

LAYOUT

