




MOTORIZED REAMER SHOE

9 | 10 2.5 CONFIGURATION

SPECIFICATIONS	IMPERIAL	METRIC
Maximum Differential Pressure	250 psi	(1,724 kPa)
Torque Slope	25.811 ft-lb/psi	(5.075 N-m/kPa)
Torque at Maximum Differential	6,453 ft-lb	(8,749 N-m)
Stall Torque	9,680 ft-lb	(13,124 N-m)
Maximum Horsepower	141 hp	(105 kW)
Flow Range	300 - 1,200 gpm	(1,136 - 4,543 lpm)
RPM Ratio	0.096 revolutions / g	(0.025 revolutions / l)
No Load RPM Range	29 - 115 rpm	
Recommended Hole Size	17.50 in	(445 mm)
Maximum OD	17.125 in	(436 mm)
Nominal OD	15.50 in	(394 mm)
Drill-Out Bit Size	12.25 in	(311 mm)
Maximum Weight on Bit	120,000 lb	(53,400 daN)
Overall Length	181.20 in	(4.60 m)
Overall Weight	3,421.68 lb	(1,552.05 kg)

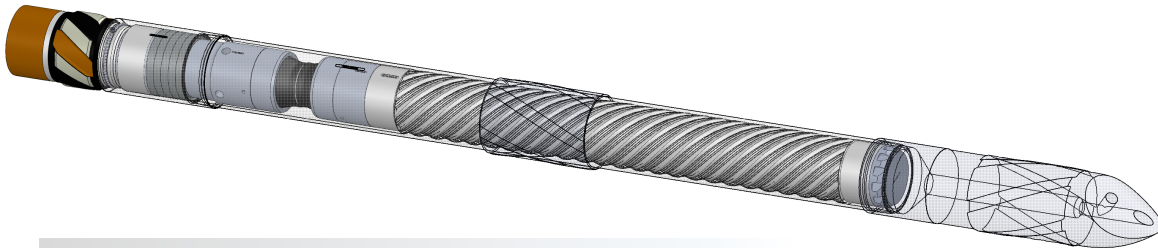

LAYOUT

